



## APPLICATION STUDY CONCRETE SPRAY RIG

### CUSTOMER

Veidekke Construction, Region Tunnel & Bergum have in five years grown into one of the leading players in tunneling in the Swedish construction market.  
Contact: Peter Antonsen


### SYSTEM

Concrete Spray Rig  
Oil: Statoil HydraWay Bio SE 46  
Oil Capacity: 200 liters



## PROBLEM VALVE PROBLEMS

Veidekke have experienced problems with the hydraulic valves for the concrete spray rig. The work is often under very demanding conditions. They have changed the oil and valves frequently to try to solve the problems.

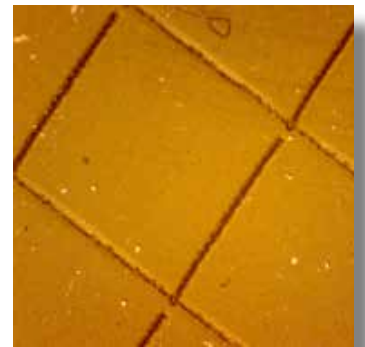

## SOLUTION EF2115D

Veidekke decided to try to clean the oil with a mobile system. After one day of treatment the result was so good that the customer decided to install a fixed system directly on the spray rig. European filter system clean oil continuously, even when the spray rig is not in operation.



## RESULTS CLEAN OIL

The result is amazing!. After 2 days of treatment, it is a remarkable difference in the oil. Approximately 2000 liters have been purified. Veidekke is far ahead in its environmental policy and protect the natural resources. Using Europafilter they take another step forward in this, by keeping the oil clean, instead of replacing it!

